

# **AC SCHNITZER**

**- Assembly instructions -**

**Fuel filler cap  
S1000RR**



**S50101967942**

# General notes!



## AC Schnitzer Fuel filler cap

Important notes!

These installation instructions must be read in their entirety before starting the installation work. completeness with regard to each work step. We reserve the right to make technical, editorial and content-related changes! AC Schnitzer accepts no liability for damage caused by improper installation!

The goods must be checked for completeness and intactness before starting work.  
Later complaints cannot be considered.

These installation instructions are intended exclusively for use by authorised AC Schnitzer or BMW dealers. BMW dealers. The target group for these installation instructions is in any case specialist personnel trained on BMW vehicles with the appropriate specialist knowledge and tools. Knowledge of material properties and standards is assumed!

Before fitting:

Before fitting, the vehicle must be adequately secured to prevent it from rolling away or falling over. For this purpose, we recommend the use of the original BMW assembly stand ! Keep children and pets away from the work area! Danger of accident due to getting caught or electrical short-circuit! Therefore, remove any jewellery (chains, watches, rings, etc.) before starting work! All work must be carried out in compliance with the applicable safety regulations (e.g. protective goggles).

After assembly:

After completion of all work, a test drive must be carried out! After the test drive, check all bolted connections for tightness.

Installation time (1 AW = 5 minutes)

The installation time is 4 AW. (This value is only a recommendation and is not binding !).

Required tools:

- Hexagon socket nut
- Torx nut
- Interchangeable ratchet
  - Screw lock medium

Montageanleitung Nr.: 5010 19 67942 / Stand: 12.04.2023 / TSch

AC Schnitzer - automobile Technik - Neuenhofstraße 160 - D - 52078 Aachen - Tel. 0241/5688 -130

# Supplied components

## AC Schnitzer Fuel filler cap

A



1x

B



7x

A AC Schnitzer fuel filler cap

B Mounting screws M5x35mm

## AC Schnitzer Fuel filler cap

**Abb. 1**  
Park the vehicle safely and secure it  
or rolling away.



**Abb. 2**  
Unlock the fuel filler cap with the ignition key and  
open.



**Abb. 3**  
Cover the fuel filler neck.



## AC Schnitzer Fuel filler cap

Fig. 4

Loosen the visible 5 fastening screws of the fuel filler neck and remove the outer ring with the fuel filler cap.




Fig. 5

Undo the exposed 2 fastening screws of the fuel filler neck and remove the fuel filler neck.



Fig. 6

Remove the fuel filler neck seal.

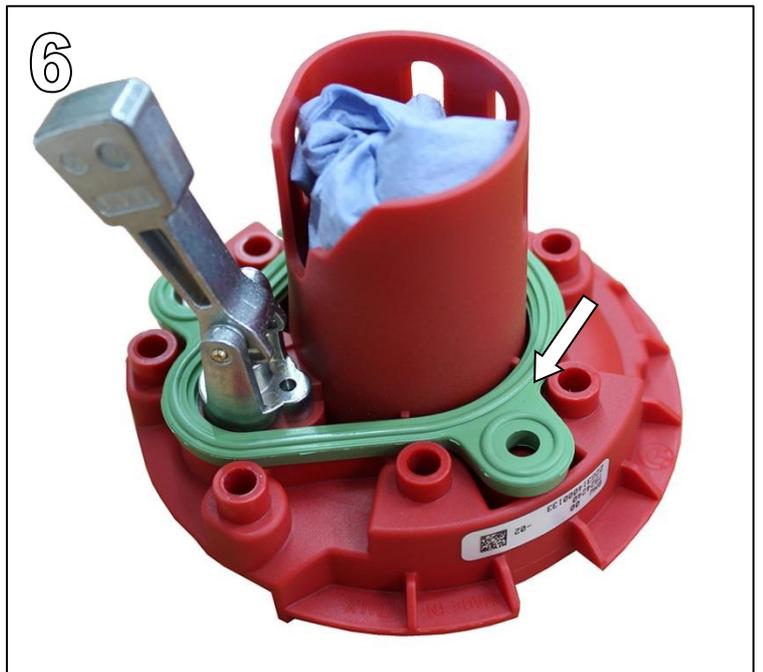

# Assembly instructions

## AC Schnitzer Fuel filler cap

Fig. 7

Remove the seal of the outer ring.



Fig. 8

Fit both seals on the AC Schnitzer fuel filler cap.



Fig. 9

Insert the AC Schnitzer fuel filler cap into the tank. Align the outer ring seal and the AC Schnitzer fuel filler cap.



## AC Schnitzer Fuel filler cap

Fig. 10

Insert the supplied fastening screws in the AC cut-out tank cap. Tighten the screws in the tank cap alternately and diagonally.

Attention !



Fig. 11

Tighten the fixing screws alternately diagonally until the AC Schnitzer fuel filler cap is firmly in place and a pressure point can be felt when tightening the fixing screws.

Ensure that the outer ring seal is seated.



Check the fastening screws for tightness.

*Errors and omissions excepted !*

**AC**  
**SCHNITZER**